


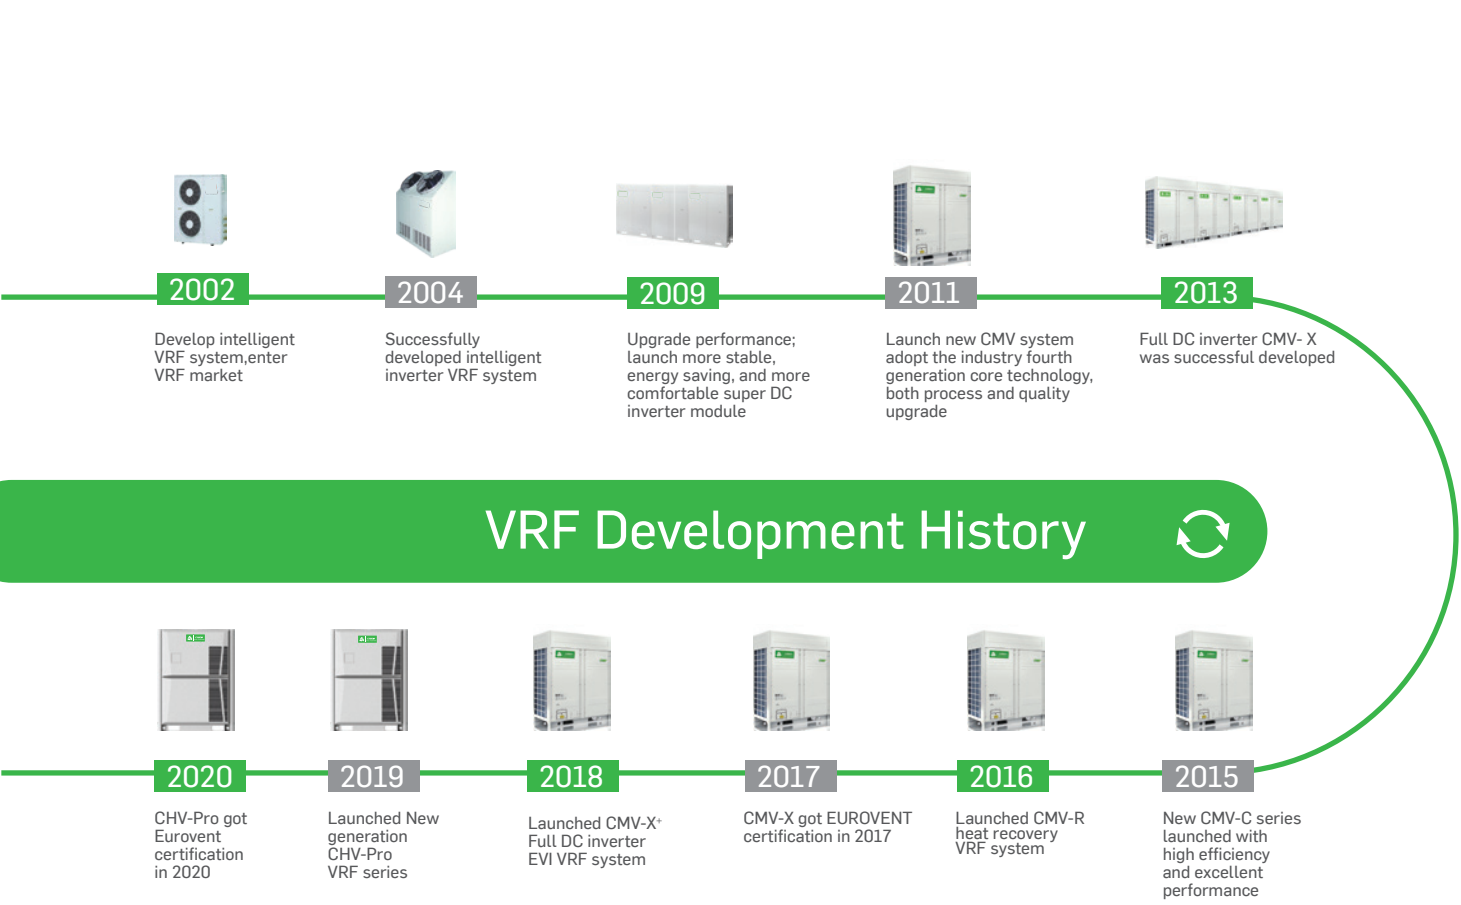


Combination Table

HP	Cooling Cap.(kW)	8HP	10HP	12HP	14HP	16HP	18HP	20HP	22HP	24HP	26HP	28HP	30HP	32HP
8	25.2	●												

Stepless Control

DC fan motor can be stepless controlled by outdoor PCB according to system's operating pressure, and it is able to reduce the energy consumption and maintain the system in good condition.

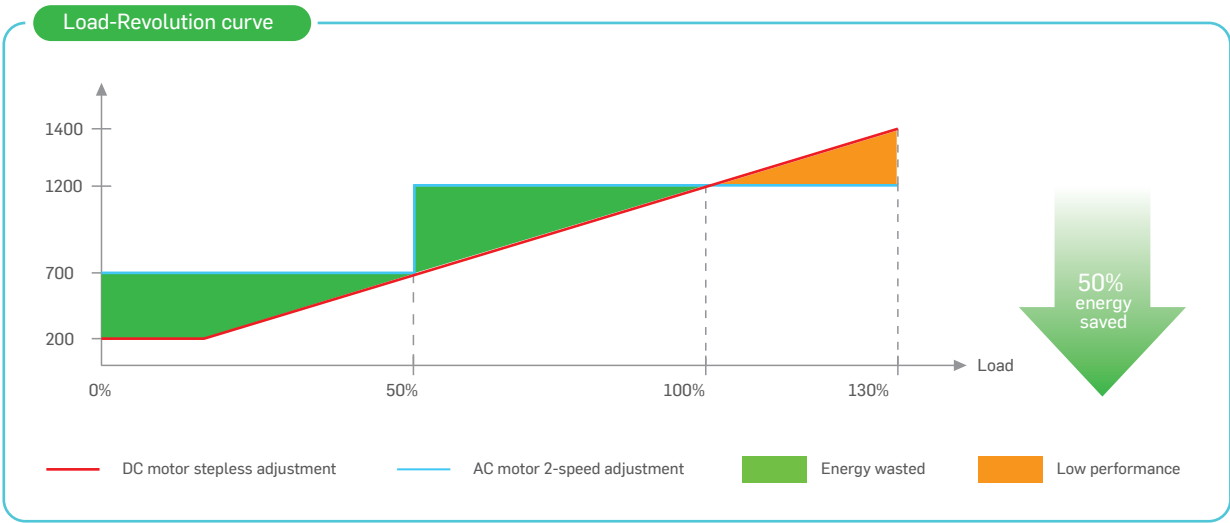

Wide Operation Range

CHV pro has a wide ambient temperature operation range, cooling at -5-55°C, and heating at -25-30°C.





380-415V/3N/50&60Hz
DC INVERTER EVI VRF SYSTEM(Scroll Compressor)

Model Name			GCHV-E252W/HZR1-DK01	GCHV-E280W/HZR1-D
------------	--	--	----------------------	-------------------



380-415V/3N/50Hz

DC INVERTER VRF SYSTEM(Rotary Compressor)

Model Name			GCHV-D252W/HZR1-DK01	GCHV-D280W/HZR1-DK01	GCHV
------------	--	--	----------------------	----------------------	------

Model Name			GCHV-D252W/CZR1-DK01
------------	--	--	----------------------




208~230V/3N/60Hz
NEW DC INVERTER VRF SYSTEM


Model Name			GCHV-D252W/HXR1	GCHV-D280W/HXR1	GCHV-D335W/HXR1	GCHV-D400W/HXR1

Model Name			GCHV-D252W/CXR1-DK01
------------	--	--	----------------------

Short Ceiling Concealed Ducted Unit

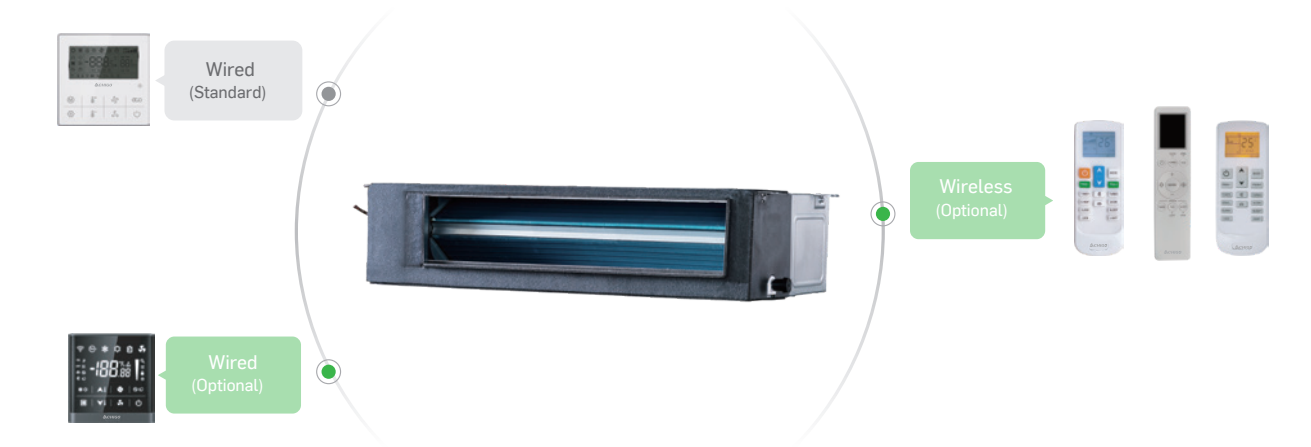

Slim body, easy to install
Has slim body with 210mm height, it is specially suitable for low suspended ceiling rooms.

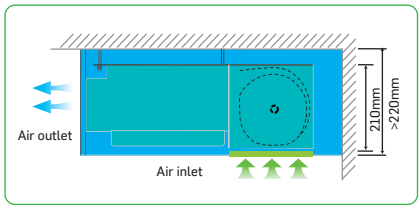


- DC fan motor is optional
- Integrated design of motor and motor bracket, lower noise
- Drain pump is optional
Pumping head is 700mm.



Features

Medium ESP Ducted Unit

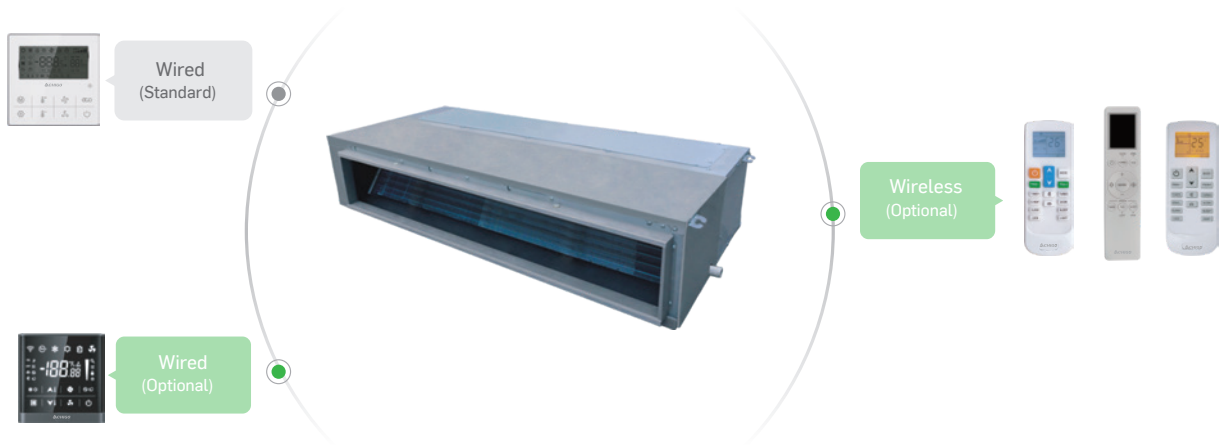

Features


Accessories

Plenum box	Air filter	EXV	Drain pump	AC motor	DC motor
Standard	Standard	Standard	Optional	Standard	Optional

Static pressure

70Pa ESP is standard, suitable for lang distance air supply, 30Pa is optional(can

High ESP Ducted Unit

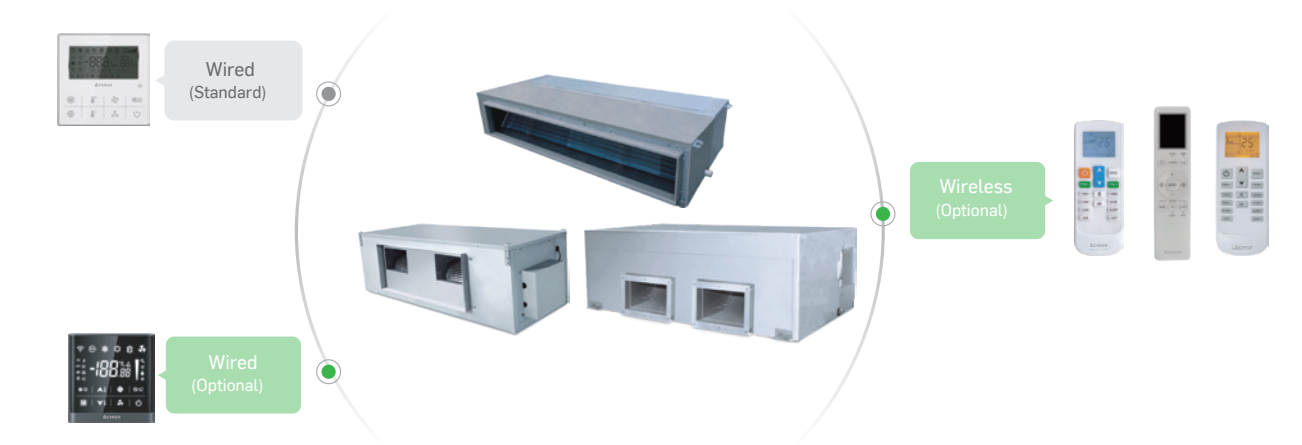

Features

Accessories

Plenum box	Air filter	EXV	Drain pump	AC motor	DC motor
Standard	Standard	Standard	Optional	Standard	/

Optional water pump

Wall Mounted Unit



Features

Accessories

Floor Ceiling Unit



Features


Accessories

Plenum box	Air filter	EXV	Drain pump	AC motor	DC motor
/	Standard	Standard(built-in)	Optional	Standard	Optional

Flexible installation


According to actual project needs, choose ceiling suspended installation or floor standing installation.

Fresh Air Processor

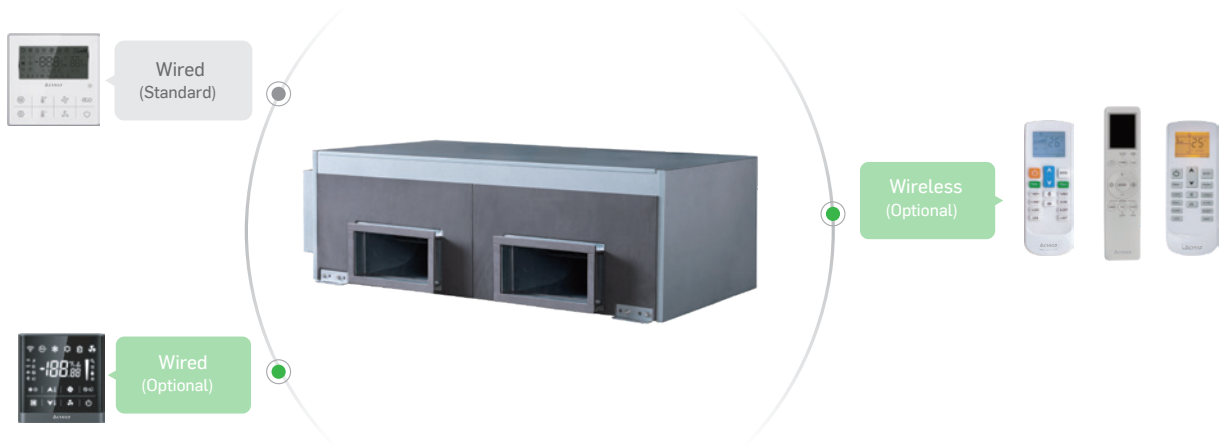

Innovative air supply technology for excellent room temperature control

Fresh air unit can be connected with other type indoor units.
Layout Example:

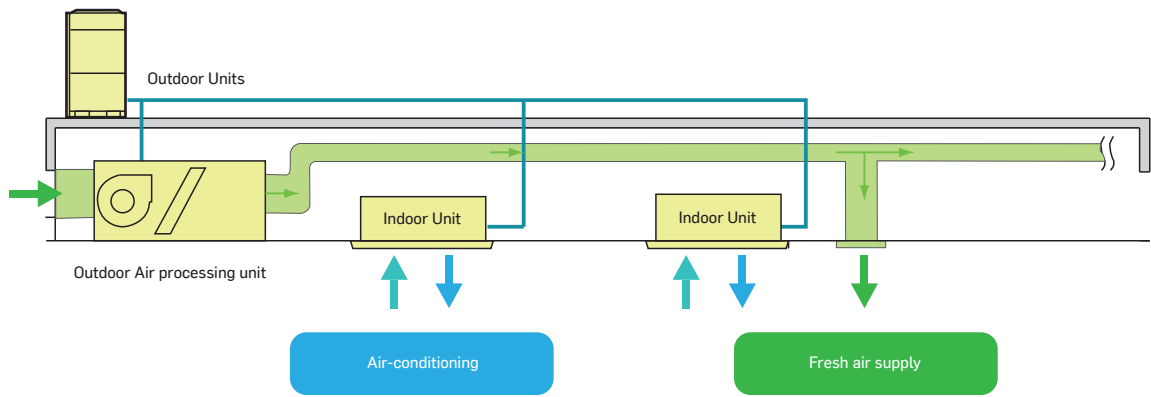

Wired Controllers



ZKX-C/T/A-06TW

- Bidirectional communication. Indoor unit's operating parameters(error code, temperature, address)can be inquired and displayed on the controller.
- Compact design
- Timer function
- Fahrenheit/centigrade setting
- Address setting
- Press button tone setting

